




2XSLCYK-J MOTOR | 3+3PE

Marking: <meters> CE 0987 SPECIALCAVI BALDASSARI 2XSLCYK-J <formation> <lot> <year> DCA-S3,D2,A3

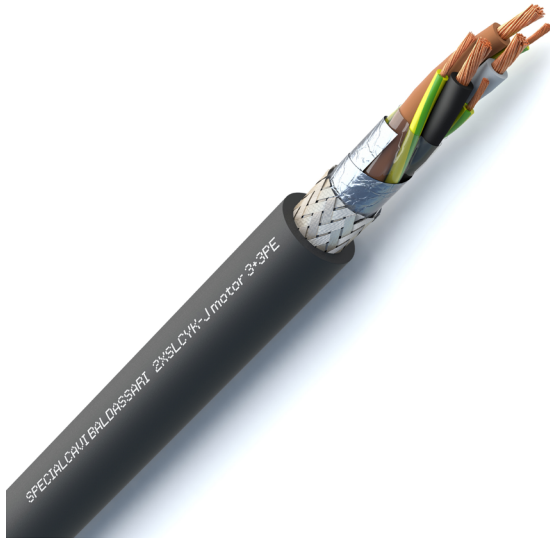

MANUFACTURING CHARACTERISTICS

Core:

Flexible bare copper conductor, class 5

Insulation:

XLPE compound

Stranding:

Cores stranded in concentric layers

Wrapping and protection:

Overall polyester tape

Screen:

1st screen: Overall aluminium/polyester tape

2nd screen: Overall tinned copper braid

Outer sheath:

Flame retardant PVC compound

Colours:*Cores identification:*

Brown + Black + Grey + 3 x Green/Yellow

Outer sheath colour:

Black (based on RAL 9005)

ELECTRICAL CHARACTERISTICS

Nominal voltage: 0.6/1kV**Max operating voltage:** 1.8kV D.C and 1.2kV A.C**Testing voltage:** 4000V

APPLICATIONS

Cable conforms to the requirements in the Construction Products Regulations (CPR EU 305/11), aimed at limiting the production and diffusion of fire and smoke.

Screened cable characterized by its special construction, used to power motors with frequency converters when full electromagnetic compatibility (EMC) is required.

The symmetrical construction of the cable (3 + 3PE) ensures the symmetry of the supply voltages on the motor terminals. Suitable for both static and dynamic connections (occasional movement) in industrial plants, process lines and machines operating in dry and humid environments.

Direct or indirect underground laying is permitted.

STANDARDS

IEC 60228

EN 50363

REACTION TO FIRE CLASS

EN 50575:2016 D_{ca} - s3, d2, a3

TEMPERATURES

Minimum working temperature:

- Fixed laying -25°C
- Occasional mobile laying w/o stress -5°C

Maximum working temperature:

- Fixed laying +90°C
- Occasional mobile laying w/o stress +90°C

Maximum short circuit temperature: +250°C

LAYING CONDITIONS



Minimum installation temperature -5°C

Min. bending radius:
d8 (fixed laying)
d15 (occasional mobile laying)Max tensile stress:
50N/mm²
(during installation)
15N/mm²
(static stress)

Fixed laying



Occasional mobile laying w/o stress




In open air



In duct or cable tray



In buried trough



Buried with protection



In buried duct



Directly buried

ON REQUEST

- Customized cores identification/outer sheath colour

**2XSLCYK-J** MOTOR | 3+3PE

PART NUMBER [n°]	FORMATION [n° x mm ²]	OUTER DIAMETER ¹ [mm]	WEIGHT ¹ [kg/km]	MAX PHASE CONDUCTOR RESISTANCE AT 20°C [Ohm/km]	MAX GROUND CONDUCTOR RESISTANCE AT 20°C [Ohm/km]
*2CXYK150003	3 X 1.50 + 3 G 0.25	10.4	161	13.30	75.00
*2CXYK250003	3 X 2.50 + 3 G 0.50	11.3	202	7.98	39.00
*2CXYK400003	3 X 4.00 + 3 G 0.75	13.2	293	4.95	26.00
*2CXYK600003	3 X 6.00 + 3 G 1.00	14.4	376	3.30	19.50
*2CXYK100003	3 X 10.00 + 3 G 1.50	17.1	562	1.91	13.30
*2CXYK160003	3 X 16.00 + 3 G 2.50	19.4	803	1.21	7.98
*2CXYK250003	3 X 25.00 + 3 G 4.00	23.9	1208	0.78	4.95
*2CXYK350003	3 X 35.00 + 3 G 6.00	25.5	1590	0.554	3.30
*2CXYK500003	3 X 50.00 + 3 G 10.00	30.2	2263	0.386	1.91
*2CXYK700003	3 X 70.00 + 3 G 10.00	33.8	2950	0.272	1.91
*2CXYK950003	3 X 95.00 + 3 G 16.00	37.8	3979	0.206	1.21
*2CXYK1200003	3 X 120.00 + 3 G 16.00	42.4	4858	0.161	1.21
*2CXYK1500003	3 X 150.00 + 3 G 25.00	47.4	6204	0.129	0.780
*2CXYK1850003	3 X 185.00 + 3 G 35.00	51.9	7678	0.106	0.554
*2CXYK2400003	3 X 240.00 + 3 G 42.50	60.1	9886	0.0801	0.457

* According to in-stock availability, cable which must be produced on request and minimum quantity
¹ Unless otherwise specified, the values for weight and diameter are indicative.
Note: other values, if available and released for publication, are available on request.