




SPECIALCAVI BALDASSARI

POWER, CONTROL AND SIGNALLING

XSLCH-J MOTOR | 3+3PE



Marking: <meters> CE 0987 SPECIALCAVI BALDASSARI XSLCH-J <formation> IEC 60332-3-24 <lot> <year> B2CA-S1A,D0,A1

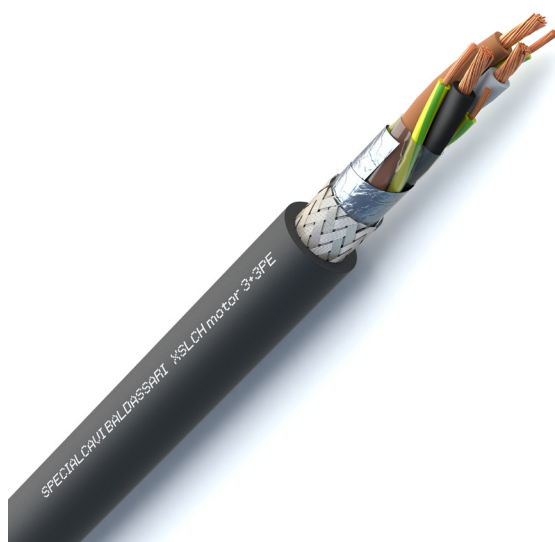

MANUFACTURING CHARACTERISTICS

Conductor:

Flexible bare copper, class 5

Insulation:

Cross-linked LSZH compound

Stranding:

Cores stranded in concentric layers

Wrapping and protection:

Overall polyester tape

Shield:

1st shield:

Overall aluminium/polyester tape

2nd shield:

Overall tinned copper braid

Outer sheath:

LSZH thermoplastic compound

Colours:

Cores identification:

Brown + Black + Grey + 3 x Green/Yellow

Outer sheath colour:

Black (based on RAL 9005)

ELECTRICAL CHARACTERISTICS

Nominal operating voltage: 0.6/1kV

Maximum operating voltage: 1.8kV D.C. and 1.2kV A.C.

Testing voltage: 4000V

APPLICATIONS

Cable conforms to the requirements in the Construction Products Regulations (CPR EU 305/11), aimed at limiting the production and diffusion of fire and smoke.

Shielded LSZH cable characterized by its special construction, used to power motors with frequency converters when full electromagnetic compatibility (EMC) is required.

The symmetrical construction of the cable (3 + 3PE) ensures the symmetry of the supply voltages on the motor terminals. The cable, made entirely of halogen-free materials, does not emit harmful substances in the event of a fire.

Suitable for both static and dynamic connections (occasional movement) in industrial plants, process lines and machines operating in dry or damp environments.

If stored/placed outdoors, the cable must be protected from UV rays.

Direct or indirect underground laying is permitted.

STANDARDS

IEC 60228

IEC 60332-3-24 Cat.C

REACTION TO FIRE CLASS

EN 50575:2016 B2_{ca} - s1a, d0, a1

TEMPERATURES

Minimum working temperature:

- Fixed laying -40°C
- Occasional mobile laying w/o stress -5°C

Maximum working temperature:

- Fixed laying +90°C
- Occasional mobile laying w/o stress +90°C

Maximum short circuit temperature: +250°C

LAYING CONDITIONS



Minimum installation temperature -5°C



Min. bending radius:
d8 (fixed laying)
d15 (occasional mobile laying)



Max tensile stress:
50N/mm² (during installation)
15N/mm² (static stress)



Fixed laying



Occasional mobile laying w/o stress




In open air



In duct or cable tray



In buried trough



Buried with protection



In buried duct



Directly buried



The cable stored/placed outside must be protected from UV rays

ON REQUEST

- Customized cores identification/outer sheath colours

XSLCH-J MOTOR | 3+3PE

PART NUMBER	FORMATION	OUTER DIAMETER ¹	WEIGHT ¹	MAX PHASE CONDUCTOR RESISTANCE AT 20°C	MAX GROUND CONDUCTOR RESISTANCE AT 20°C
[n°]	[n° x mm ²]	[mm]	[kg/km]	[Ohm/km]	[Ohm/km]
*2CZUK15003	3 X 1.50 + 3 G 0.25	10.3	167	13.30	75.00
*2CZUK25003	3 X 2.50 + 3 G 0.50	11.4	216	7.98	39.00
*2CZUK40003	3 X 4.00 + 3 G 0.75	13.3	311	4.95	26.00
*2CZUK60003	3 X 6.00 + 3 G 1.00	14.5	397	3.30	19.50
*2CZUK100003	3 X 10.00 + 3 G 1.50	17.1	586	1.91	13.30
*2CZUK160003	3 X 16.00 + 3 G 2.50	19.6	835	1.21	7.98
*2CZUK250003	3 X 25.00 + 3 G 4.00	23.0	1230	0.780	4.95
*2CZUK350003	3 X 35.00 + 3 G 6.00	25.8	1644	0.554	3.30
*2CZUK500003	3 X 50.00 + 3 G 10.00	30.3	2324	0.386	1.91
*2CZUK700003	3 X 70.00 + 3 G 10.00	34.5	3063	0.272	1.91
*2CZUK950003	3 X 95.00 + 3 G 16.00	38.8	4126	0.206	1.21
*2CZUK1200003	3 X 120.00 + 3 G 16.00	44.1	5071	0.161	1.21
*2CZUK1500003	3 X 150.00 + 3 G 25.00	47.6	6362	0.129	0.780
*2CZUK1850003	3 X 185.00 + 3 G 35.00	52.8	7928	0.106	0.554
*2CZUK2400003	3 X 240.00 + 3 G 42.50	60.3	10161	0.0801	0.457

* According to in-stock availability, cable which must be produced on request and minimum quantity

¹ Unless otherwise specified, the values for weight and diameter are indicative.

Note: other values, if available and released for publication, are available on request.